

長スパン用みぞぶた(横断溝用)

IB-V(スベリ止)

スベリ止

普通目

横断溝用

IB-V 125-6

長スパン用
みぞぶた
スベリ止

みぞ幅寸法(600mm)
主梁高さ(125mm)

T-25

T-20

T-14

T-6

T-2

歩道用







■材質・表面処理

材質:SS400


処理:溶融亜鉛めっき(グレーチング)

樹脂系塗装(受枠)

※IB-Vは補助部材のみスベリ止材です。

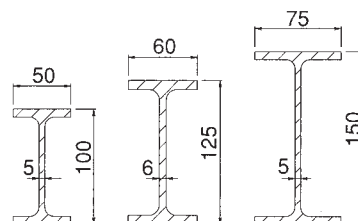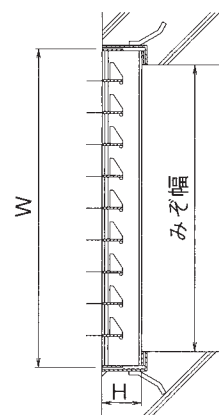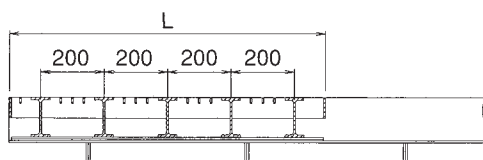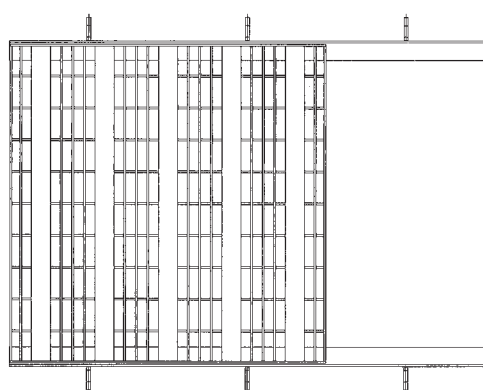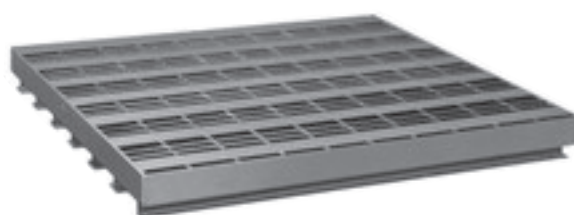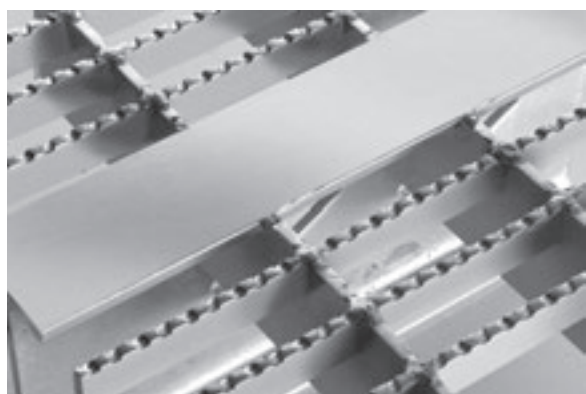

IB グレーチング受枠

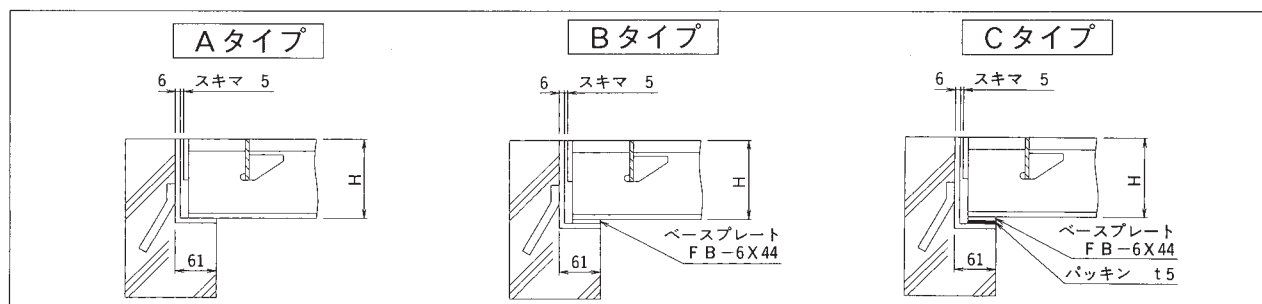

長スパンみぞぶた (呼称・寸法・重量・価格表)

T-25

みぞ幅 mm	呼称記号	ニムラグレーチング							受 枠		総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	Hmm	ピッチ						
600	IB-V 125-6	700	995	125	200	65	100	87.2	L131×61×6	19.7	106.9	※別途見積り させていただきます。	
700	IB-V 125-7	800	995	125	200	65	100	98.6	L131×61×6	19.7	118.3		
800	IB-V 125-8	900	995	125	200	65	100	110.2	L131×61×6	19.7	129.9		
900	IB-V 125-9	1000	995	125	200	65	100	121.6	L131×61×6	19.7	141.3		
1000	IB-V 150-10	1100	995	150	200	65	100	137.7	L156×61×6	22.1	159.8		
1100	IB-V 150-11	1200	995	150	200	65	100	149.6	L156×61×6	22.1	171.7		
1200	IB-V 150-12	1300	995	150	200	65	100	161.5	L156×61×6	22.1	183.6		
1300	IB-V 150-13	1400	995	150	150	65	100	173.4	L156×61×6	22.1	195.5		
1400	IB-V 150-14	1500	995	150	150	65	100	185.2	L156×61×6	22.1	207.3		
1500	IB-V 150-15	1600	995	150	150	65	100	203.8	L156×61×6	22.1	225.9		
1600	IB-V 150-16	1700	995	150	150	65	100	215.8	L156×61×6	22.1	237.9		

T-20



みぞ幅 mm	呼称記号	ニムラグレーチング							受		枠	総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		重量 kg/枚	寸法 mm	重量 kg/枚	本体		受枠	
				Hmm	ピッチ	Hmm	ピッチ							
600	IB-V 100-6	700	995	100	200	50	100	69.6	L106×61×6	17.4	87.0	※別途見積り させていただきます。		
700	IB-V 100-7	800	995	100	200	50	100	85.9	L106×61×6	17.4	103.3			
800	IB-V 125-8	900	995	125	200	65	100	110.2	L131×61×6	19.7	129.9			
900	IB-V 125-9	1000	995	125	200	65	100	121.6	L131×61×6	19.7	141.3			
1000	IB-V 125-10	1100	995	125	200	65	100	123.4	L131×61×6	19.7	143.1			
1100	IB-V 125-11	1200	995	125	200	65	100	134.1	L131×61×6	19.7	153.8			
1200	IB-V 150-12	1300	995	150	200	65	100	161.5	L156×61×6	22.1	183.6			
1300	IB-V 150-13	1400	995	150	200	65	100	173.3	L156×61×6	22.1	195.4			
1400	IB-V 150-14	1500	995	150	200	65	100	185.2	L156×61×6	22.1	207.3			
1500	IB-V 150-15	1600	995	150	200	65	100	197.1	L156×61×6	22.1	219.2			
1600	IB-V 150-16	1700	995	150	150	65	100	209.1	L156×61×6	22.1	231.2			
1700	IB-V 150-17	1800	995	150	150	65	100	231.3	L156×61×6	22.1	253.4			
1800	IB-V 150-18	1900	995	150	150	65	100	243.8	L156×61×6	22.1	265.9			
1900	IB-V 150-19	2000	995	150	150	65	100	256.2	L156×61×6	22.1	278.3			
2000	IB-V 150-20	2100	995	150	150	65	100	268.3	L156×61×6	22.1	290.4			

T-14

みぞ幅 mm	呼称記号	ニムラグレーチング						受 枠		総重量 kg/組	価 格		
		W mm	L mm	主梁桁		横桁		重量 kg/枚	寸法 mm		重量 kg/枚	本体	受枠
				Hmm	ピッチ	Hmm	ピッチ						
600	IB-V 100-6	700	995	100	200	50	100	69.6	L106×61×6	17.4	87.0	※別途見積り させていただきます。	
700	IB-V 100-7	800	995	100	200	50	100	85.9	L106×61×6	17.4	103.3		
800	IB-V 100-8	900	995	100	200	50	100	95.8	L106×61×6	17.4	113.2		
900	IB-V 100-9	1000	995	100	200	50	100	105.6	L106×61×6	17.4	123.0		
1000	IB-V 125-10	1100	995	125	200	65	100	123.4	L131×61×6	19.7	143.1		
1100	IB-V 125-11	1200	995	125	200	65	100	134.1	L131×61×6	19.7	153.8		
1200	IB-V 125-12	1300	995	125	200	65	100	144.7	L131×61×6	19.7	164.4		
1300	IB-V 125-13	1400	995	125	200	65	100	155.4	L131×61×6	19.7	175.1		
1400	IB-V 125-14	1500	995	125	200	65	100	166.7	L131×61×6	19.7	186.4		
1500	IB-V 125-15	1600	995	125	200	65	100	176.7	L131×61×6	19.7	196.4		
1600	IB-V 125-16	1700	995	125	200	65	100	202.5	L131×61×6	19.7	222.2		
1700	IB-V 150-17	1800	995	150	200	65	100	231.3	L156×61×6	22.1	253.4		
1800	IB-V 150-18	1900	995	150	200	65	100	243.8	L156×61×6	22.1	265.9		
1900	IB-V 150-19	2000	995	150	200	65	100	256.2	L156×61×6	22.1	278.3		
2000	IB-V 150-20	2100	995	150	200	65	100	268.7	L156×61×6	22.1	290.8		

長スパン用みぞぶた(横断溝用)

IB(一般型)

一般型

普通目

横断溝用

IB 125-6

長スパン用
みぞぶた
一般型

みぞ幅寸法(600mm)
主梁高さ(125mm)

T-25

T-20

T-14

T-6

T-2






歩道用

■材質・表面処理


材質:SS400

処理:溶融亜鉛めっき(グレーチング)

樹脂系塗装(受枠)

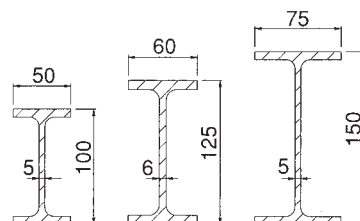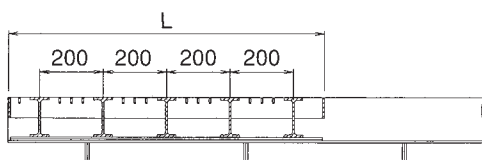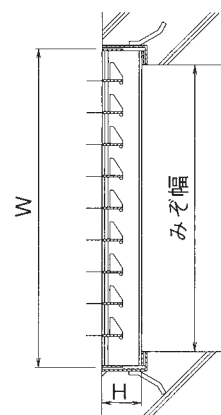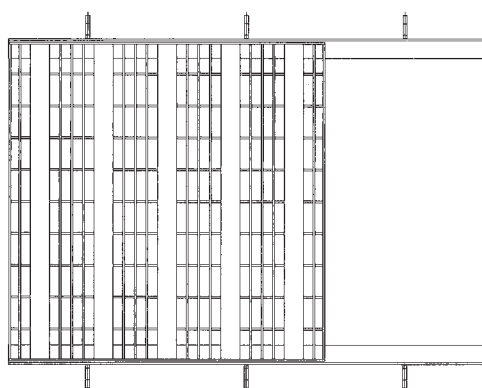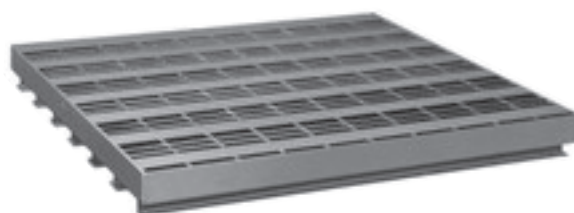

IB グレーチング受枠

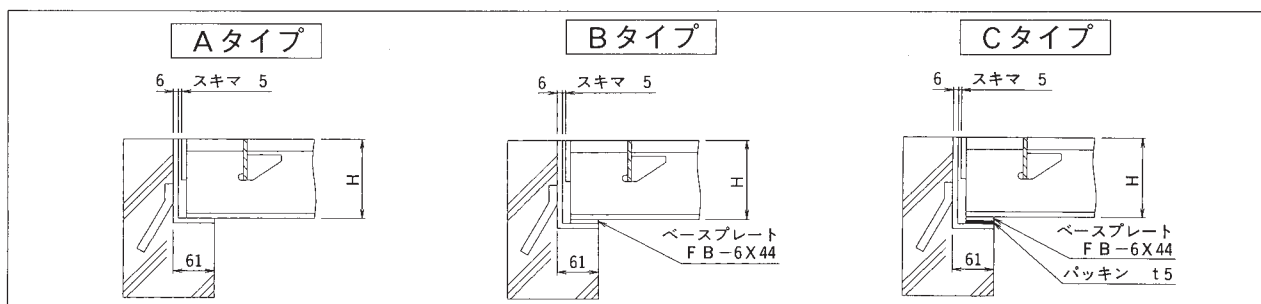

長スパンみぞぶた (呼称・寸法・重量・価格表)

T-25

みぞ幅 mm	呼称記号	ニムラグレーチング							受 枠		総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	Hmm	ピッチ						
600	IB 125-6	700	995	125	200	65	100	87.2	L131×61×6	19.7	106.9	※別途見積り させていただきます。	
700	IB 125-7	800	995	125	200	65	100	98.6	L131×61×6	19.7	118.3		
800	IB 125-8	900	995	125	200	65	100	110.2	L131×61×6	19.7	129.9		
900	IB 125-9	1000	995	125	200	65	100	121.6	L131×61×6	19.7	141.3		
1000	IB 150-10	1100	995	150	200	65	100	137.7	L156×61×6	22.1	159.8		
1100	IB 150-11	1200	995	150	200	65	100	149.6	L156×61×6	22.1	171.7		
1200	IB 150-12	1300	995	150	200	65	100	161.5	L156×61×6	22.1	183.6		
1300	IB 150-13	1400	995	150	150	65	100	173.4	L156×61×6	22.1	195.5		
1400	IB 150-14	1500	995	150	150	65	100	185.2	L156×61×6	22.1	207.3		
1500	IB 150-15	1600	995	150	150	65	100	203.8	L156×61×6	22.1	225.9		
1600	IB 150-16	1700	995	150	150	65	100	215.8	L156×61×6	22.1	237.9		

T-20



みぞ幅 mm	呼称記号	ニムラグレーチング							受		枠	総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		重量 kg/枚	寸法 mm	重量 kg/枚	本体		受枠	
				Hmm	ピッチ	Hmm	ピッチ							
600	IB 100-6	700	995	100	200	50	100	69.6	L106×61×6	17.4	87.0	※別途見積り させていただきます。		
700	IB 100-7	800	995	100	200	50	100	85.9	L106×61×6	17.4	103.3			
800	IB 125-8	900	995	125	200	65	100	110.2	L131×61×6	19.7	129.9			
900	IB 125-9	1000	995	125	200	65	100	121.6	L131×61×6	19.7	141.3			
1000	IB 125-10	1100	995	125	200	65	100	123.4	L131×61×6	19.7	143.1			
1100	IB 125-11	1200	995	125	200	65	100	134.1	L131×61×6	19.7	153.8			
1200	IB 150-12	1300	995	150	200	65	100	161.5	L156×61×6	22.1	183.6			
1300	IB 150-13	1400	995	150	200	65	100	173.3	L156×61×6	22.1	195.4			
1400	IB 150-14	1500	995	150	200	65	100	185.2	L156×61×6	22.1	207.3			
1500	IB 150-15	1600	995	150	200	65	100	197.1	L156×61×6	22.1	219.2			
1600	IB 150-16	1700	995	150	150	65	100	209.1	L156×61×6	22.1	231.2			
1700	IB 150-17	1800	995	150	150	65	100	231.3	L156×61×6	22.1	253.4			
1800	IB 150-18	1900	995	150	150	65	100	243.8	L156×61×6	22.1	265.9			
1900	IB 150-19	2000	995	150	150	65	100	256.2	L156×61×6	22.1	278.3			
2000	IB 150-20	2100	995	150	150	65	100	268.3	L156×61×6	22.1	290.4			

T-14



みぞ幅 mm	呼称記号	ニムラグレーチング						受		枠	総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	Hmm	ピッチ						
600	IB 100-6	700	995	100	200	50	100	69.6	L106×61×6	17.4	87.0	※別途見積り させていただきます。	
700	IB 100-7	800	995	100	200	50	100	85.9	L106×61×6	17.4	103.3		
800	IB 100-8	900	995	100	200	50	100	95.8	L106×61×6	17.4	113.2		
900	IB 100-9	1000	995	100	200	50	100	105.6	L106×61×6	17.4	123.0		
1000	IB 125-10	1100	995	125	200	65	100	123.4	L131×61×6	19.7	143.1		
1100	IB 125-11	1200	995	125	200	65	100	134.1	L131×61×6	19.7	153.8		
1200	IB 125-12	1300	995	125	200	65	100	144.7	L131×61×6	19.7	164.4		
1300	IB 125-13	1400	995	125	200	65	100	155.4	L131×61×6	19.7	175.1		
1400	IB 125-14	1500	995	125	200	65	100	166.7	L131×61×6	19.7	186.4		
1500	IB 125-15	1600	995	125	200	65	100	176.7	L131×61×6	19.7	196.4		
1600	IB 125-16	1700	995	125	200	65	100	202.5	L131×61×6	19.7	222.2		
1700	IB 150-17	1800	995	150	200	65	100	231.3	L156×61×6	22.1	253.4		
1800	IB 150-18	1900	995	150	200	65	100	243.8	L156×61×6	22.1	265.9		
1900	IB 150-19	2000	995	150	200	65	100	256.2	L156×61×6	22.1	278.3		
2000	IB 150-20	2100	995	150	200	65	100	268.7	L156×61×6	22.1	290.8		

長スパン用
みぞぶた

一般型