

長スパン用みぞぶた(横断溝用)

IB-V(スベリ止)

スベリ止

普通目

横断溝用

IB-V 125-6

長スパン用
みぞぶた
スベリ止

みぞ幅寸法(600mm)
主梁高さ(125mm)

T-25

T-20

T-14

T-6

T-2

歩道用







■材質・表面処理

材質:SS400


処理:溶融亜鉛めっき(グレーチング)

樹脂系塗装(受枠)

※IB-Vは補助部材のみスベリ止材です。

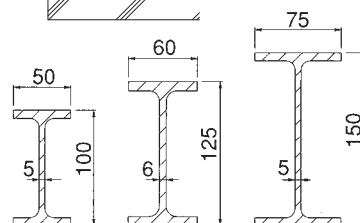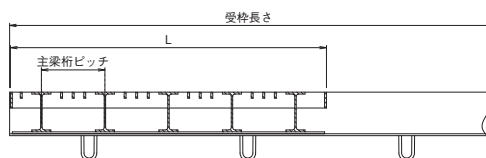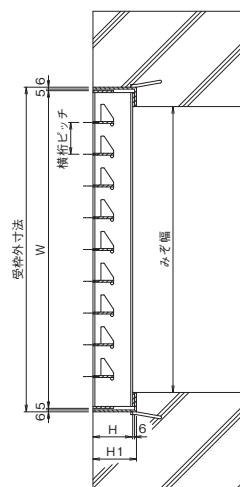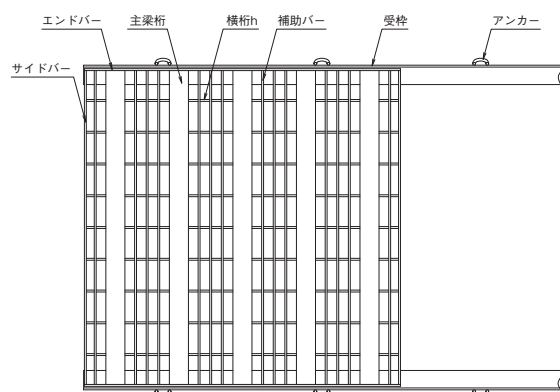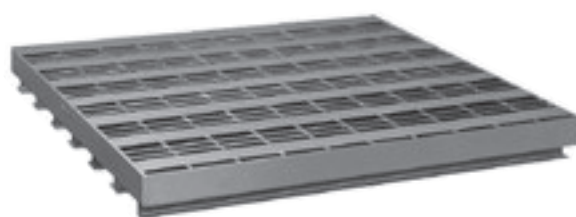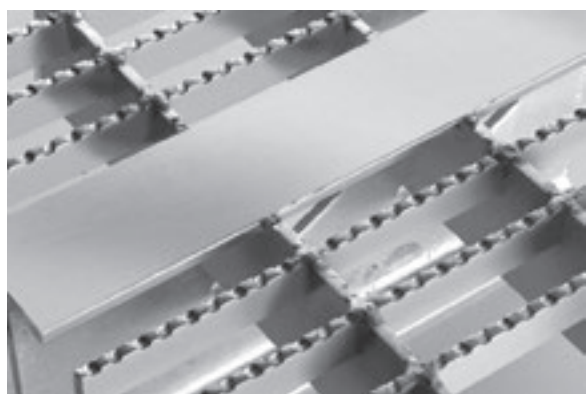

IB グレーチング受枠

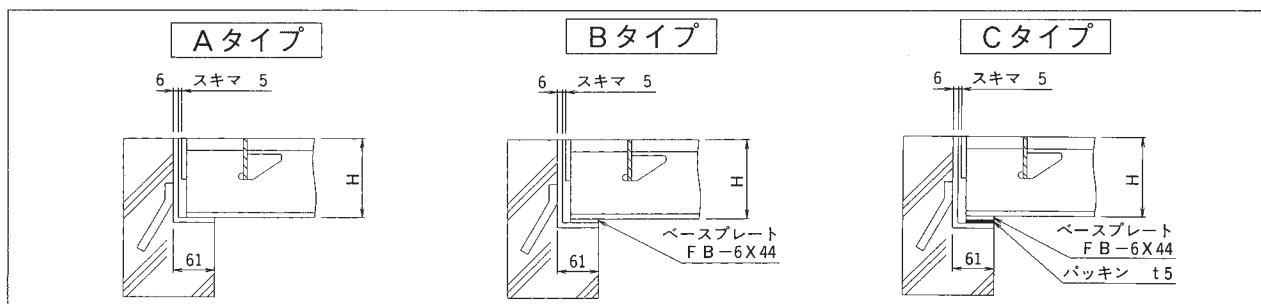

長スパンみぞぶた (呼称・寸法・重量・価格表)

T-25

みぞ幅 mm	呼称記号	ニムラグレーチング								受 枠		総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		全高 H1	重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	hmm	ピッチ							
600	IB-V 125-6	700	995	125	200	65	100	131	91.3	L137×61×6	18.5	109.8	※別途見積り させていただきます。	
700	IB-V 125-7	800	995	125	200	65	100	131	102.7	L137×61×6	18.5	121.2		
800	IB-V 125-8	900	995	125	200	65	100	131	114.3	L137×61×6	18.5	132.8		
900	IB-V 125-9	1000	995	125	200	65	100	131	125.7	L137×61×6	18.5	144.2		
1000	IB-V 150-10	1100	995	150	200	65	100	156	141.8	L162×61×6	20.9	162.7		
1100	IB-V 150-11	1200	995	150	200	65	100	156	153.7	L162×61×6	20.9	174.6		
1200	IB-V 150-12	1300	995	150	200	65	100	156	165.6	L162×61×6	20.9	186.5		
1300	IB-V 150-13	1400	995	150	150	65	100	156	177.5	L162×61×6	20.9	198.4		
1400	IB-V 150-14	1500	995	150	150	65	100	156	189.3	L162×61×6	20.9	210.2		
1500	IB-V 150-15	1600	995	150	150	65	100	156	207.9	L162×61×6	20.9	228.8		
1600	IB-V 150-16	1700	995	150	150	65	100	156	219.9	L162×61×6	20.9	240.8		

T-20



みぞ幅 mm	呼称記号	ニムラグレーチング								受 枠		総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		全高 H1	重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	hmm	ピッチ							
600	IB-V 100-6	700	995	100	200	50	100	106	73.7	L112×61×6	16.2	89.9	※別途見積り させていただきます。	
700	IB-V 100-7	800	995	100	200	50	100	106	90.0	L112×61×6	16.2	106.2		
800	IB-V 125-8	900	995	125	200	65	100	131	114.3	L137×61×6	18.5	132.8		
900	IB-V 125-9	1000	995	125	200	65	100	131	125.7	L137×61×6	18.5	144.2		
1000	IB-V 125-10	1100	995	125	200	65	100	131	127.5	L137×61×6	18.5	146.0		
1100	IB-V 125-11	1200	995	125	200	65	100	131	138.2	L137×61×6	18.5	156.7		
1200	IB-V 150-12	1300	995	150	200	65	100	156	165.6	L162×61×6	20.9	186.5		
1300	IB-V 150-13	1400	995	150	200	65	100	156	177.4	L162×61×6	20.9	198.3		
1400	IB-V 150-14	1500	995	150	200	65	100	156	189.3	L162×61×6	20.9	210.2		
1500	IB-V 150-15	1600	995	150	200	65	100	156	201.2	L162×61×6	20.9	222.1		
1600	IB-V 150-16	1700	995	150	150	65	100	156	213.2	L162×61×6	20.9	234.1		
1700	IB-V 150-17	1800	995	150	150	65	100	156	235.4	L162×61×6	20.9	256.3		
1800	IB-V 150-18	1900	995	150	150	65	100	156	247.9	L162×61×6	20.9	268.8		
1900	IB-V 150-19	2000	995	150	150	65	100	156	260.3	L162×61×6	20.9	281.2		
2000	IB-V 150-20	2100	995	150	150	65	100	156	272.4	L162×61×6	20.9	293.3		

T-14



みぞ幅 mm	呼称記号	ニムラグレーチング								受		枠	総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		全高 H1	重量 kg/枚	寸法 mm	重量 kg/枚	本体		受枠	
				Hmm	ピッチ	hmm	ピッチ								
600	IB-V 100-6	700	995	100	200	50	100	106	73.7	L112×61×6	16.2	89.9	※別途見積り させていただきます。		
700	IB-V 100-7	800	995	100	200	50	100	106	90.0	L112×61×6	16.2	106.2			
800	IB-V 100-8	900	995	100	200	50	100	106	99.9	L112×61×6	16.2	116.1			
900	IB-V 100-9	1000	995	100	200	50	100	106	109.7	L112×61×6	16.2	125.9			
1000	IB-V 125-10	1100	995	125	200	65	100	131	127.5	L137×61×6	18.5	146.0			
1100	IB-V 125-11	1200	995	125	200	65	100	131	138.2	L137×61×6	18.5	156.7			
1200	IB-V 125-12	1300	995	125	200	65	100	131	148.8	L137×61×6	18.5	167.3			
1300	IB-V 125-13	1400	995	125	200	65	100	131	159.5	L137×61×6	18.5	178.0			
1400	IB-V 125-14	1500	995	125	200	65	100	131	170.8	L137×61×6	18.5	189.3			
1500	IB-V 125-15	1600	995	125	200	65	100	131	180.8	L137×61×6	18.5	199.3			
1600	IB-V 125-16	1700	995	125	200	65	100	131	206.6	L137×61×6	18.5	225.1			
1700	IB-V 150-17	1800	995	150	200	65	100	156	235.4	L162×61×6	20.9	256.3			
1800	IB-V 150-18	1900	995	150	200	65	100	156	247.9	L162×61×6	20.9	268.8			
1900	IB-V 150-19	2000	995	150	200	65	100	156	260.3	L162×61×6	20.9	281.2			
2000	IB-V 150-20	2100	995	150	200	65	100	156	272.8	L162×61×6	20.9	293.7			

※注文情報

●Bタイプ(ベースプレート付)が標準仕様です。

長スパン用みぞぶた(横断溝用)

IB(一般型)

一般型

普通目

横断溝用

IB 125-6

長スパン用
みぞぶた
一般型

—みぞ幅寸法(600mm)
—主梁高さ(125mm)

主梁高さ(125mm)

■材質・表面处理

材質:SS400

処理: 溶融亜鉛めっき (グレーチング)

樹脂系塗装(受枠)

T-25






T-20

T-14


T-6

T-2

歩道用

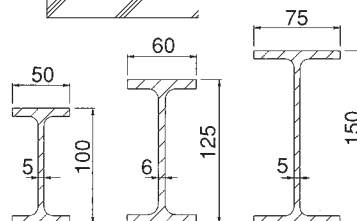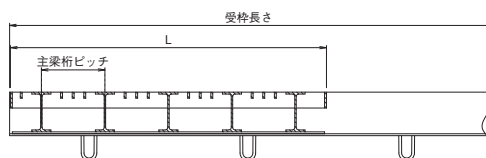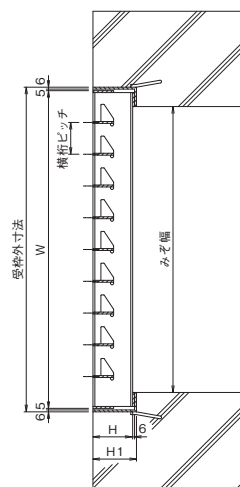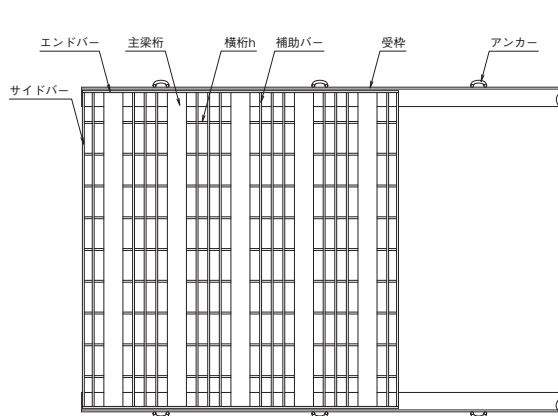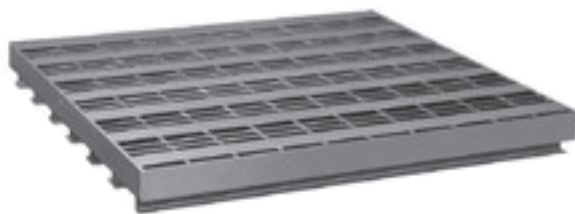

IB グレーチング受枠

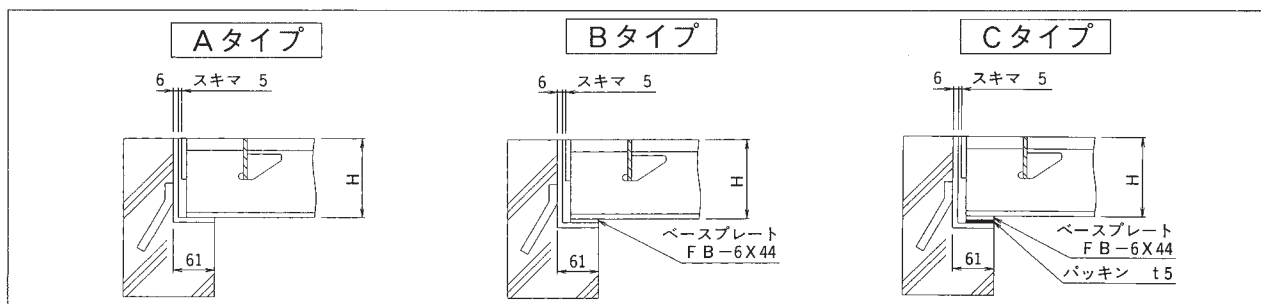

長スパンみぞぶた (呼称・寸法・重量・価格表)

T-25

みぞ幅 mm	呼称記号	ニムラグレーチング								受 枠		総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		全高 H1	重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	hmm	ピッチ							
600	IB 125-6	700	995	125	200	65	100	131	91.3	L137×61×6	18.5	109.8	※別途見積り させていただきます。	
700	IB 125-7	800	995	125	200	65	100	131	102.7	L137×61×6	18.5	121.2		
800	IB 125-8	900	995	125	200	65	100	131	114.3	L137×61×6	18.5	132.8		
900	IB 125-9	1000	995	125	200	65	100	131	125.7	L137×61×6	18.5	144.2		
1000	IB 150-10	1100	995	150	200	65	100	156	141.8	L162×61×6	20.9	162.7		
1100	IB 150-11	1200	995	150	200	65	100	156	153.7	L162×61×6	20.9	174.6		
1200	IB 150-12	1300	995	150	200	65	100	156	165.6	L162×61×6	20.9	186.5		
1300	IB 150-13	1400	995	150	150	65	100	156	177.5	L162×61×6	20.9	198.4		
1400	IB 150-14	1500	995	150	150	65	100	156	189.3	L162×61×6	20.9	210.2		
1500	IB 150-15	1600	995	150	150	65	100	156	207.9	L162×61×6	20.9	228.8		
1600	IB 150-16	1700	995	150	150	65	100	156	219.9	L162×61×6	20.9	240.8		

T-20



みぞ幅 mm	呼称記号	ニムラグレーチング								受 枠		総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		全高 H1	重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	hmm	ピッチ							
600	IB 100-6	700	995	100	200	50	100	106	73.7	L112×61×6	16.2	89.9	※別途見積り させていただきます。	
700	IB 100-7	800	995	100	200	50	100	106	90.0	L112×61×6	16.2	106.2		
800	IB 125-8	900	995	125	200	65	100	131	114.3	L137×61×6	18.5	132.8		
900	IB 125-9	1000	995	125	200	65	100	131	125.7	L137×61×6	18.5	144.2		
1000	IB 125-10	1100	995	125	200	65	100	131	127.5	L137×61×6	18.5	146.0		
1100	IB 125-11	1200	995	125	200	65	100	131	138.2	L137×61×6	18.5	156.7		
1200	IB 150-12	1300	995	150	200	65	100	156	165.6	L162×61×6	20.9	186.5		
1300	IB 150-13	1400	995	150	200	65	100	156	177.4	L162×61×6	20.9	198.3		
1400	IB 150-14	1500	995	150	200	65	100	156	189.3	L162×61×6	20.9	210.2		
1500	IB 150-15	1600	995	150	200	65	100	156	201.2	L162×61×6	20.9	222.1		
1600	IB 150-16	1700	995	150	150	65	100	156	213.2	L162×61×6	20.9	234.1		
1700	IB 150-17	1800	995	150	150	65	100	156	235.4	L162×61×6	20.9	256.3		
1800	IB 150-18	1900	995	150	150	65	100	156	247.9	L162×61×6	20.9	268.8		
1900	IB 150-19	2000	995	150	150	65	100	156	260.3	L162×61×6	20.9	281.2		
2000	IB 150-20	2100	995	150	150	65	100	156	272.4	L162×61×6	20.9	293.3		

T-14

みぞ幅 mm	呼称記号	ニムラグレーチング								受 枠		総重量 kg/組	価 格	
		W mm	L mm	主梁桁		横桁		全高 H1	重量 kg/枚	寸法 mm	重量 kg/枚		本体	受枠
				Hmm	ピッチ	hmm	ピッチ							
600	IB 100-6	700	995	100	200	50	100	106	73.7	L112×61×6	16.2	89.9	※別途見積り させていただきます。	
700	IB 100-7	800	995	100	200	50	100	106	90.0	L112×61×6	16.2	106.2		
800	IB 100-8	900	995	100	200	50	100	106	99.9	L112×61×6	16.2	116.1		
900	IB 100-9	1000	995	100	200	50	100	106	109.7	L112×61×6	16.2	125.9		
1000	IB 125-10	1100	995	125	200	65	100	131	127.5	L137×61×6	18.5	146.0		
1100	IB 125-11	1200	995	125	200	65	100	131	138.2	L137×61×6	18.5	156.7		
1200	IB 125-12	1300	995	125	200	65	100	131	148.8	L137×61×6	18.5	167.3		
1300	IB 125-13	1400	995	125	200	65	100	131	159.5	L137×61×6	18.5	178.0		
1400	IB 125-14	1500	995	125	200	65	100	131	170.8	L137×61×6	18.5	189.3		
1500	IB 125-15	1600	995	125	200	65	100	131	180.8	L137×61×6	18.5	199.3		
1600	IB 125-16	1700	995	125	200	65	100	131	206.6	L137×61×6	18.5	225.1		
1700	IB 150-17	1800	995	150	200	65	100	156	235.4	L162×61×6	20.9	256.3		
1800	IB 150-18	1900	995	150	200	65	100	156	247.9	L162×61×6	20.9	268.8		
1900	IB 150-19	2000	995	150	200	65	100	156	260.3	L162×61×6	20.9	281.2		
2000	IB 150-20	2100	995	150	200	65	100	156	272.8	L162×61×6	20.9	293.7		

※注文情報

●Bタイプ(ベースプレート付)が標準仕様です。