

■用途

- プラント工場、ビルディング ●橋梁、吊橋、鉄塔 ●海上石油基地、船舶
- 各種発電所の床、階段 ●浄水場、洗車場、処理場

1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900		
87.2	105.7																	
4.76	6.40																	
55.0	66.7	79.4	93.1															
3.13	4.20	5.54	7.17															
53.3	64.6	76.9	90.2	104.6	120.0													
2.27	3.05	4.02	5.21	6.64	8.34													
34.9	42.3	50.4	59.1	68.5	78.5	89.3	100.7	112.8										
1.49	2.00	2.64	3.41	4.35	5.47	6.79	8.33	10.13										
37.8	45.8	54.5	64.0	74.2	85.1	96.7	109.1	122.2										
1.36	1.83	2.41	3.11	3.97	4.99	6.19	7.60	9.24										
24.6	29.8	35.5	41.6	48.2	55.3	62.9	70.9	79.5	88.4	97.9	107.8	118.2						
0.89	1.19	1.57	2.03	2.59	3.25	4.04	4.96	6.03	7.26	8.68	10.29	12.11						
18.7	22.7	27.0	31.6	36.7	42.1	47.8	53.9	60.4	67.2	74.4	82.0	89.9	98.2	106.8	115.8	125.1		
0.58	0.78	1.02	1.33	1.69	2.12	2.63	3.23	3.93	4.74	5.66	6.71	7.90	9.24	10.75	12.43	14.30		
たわみ ≤									スパン 500	スパン 400			スパン 300			スパン 200		



1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900		
54.7	66.3	78.9	92.6	107.3														
2.86	3.85	5.07	6.56	8.37														
33.6	40.7	48.5	56.9	65.9	75.6	86.0	97.0	108.6										
1.39	1.87	2.46	3.18	4.05	5.10	6.33	7.77	9.44										
24.2	29.3	34.8	40.9	47.4	54.4	61.8	69.7	78.1	86.9	96.2	105.9	116.2						
0.84	1.13	1.49	1.93	2.46	3.09	3.84	4.71	5.73	6.90	8.24	9.77	11.50						
18.2	22.1	26.3	30.8	35.7	41.0	46.6	52.5	58.8	65.5	72.5	79.8	87.5	95.6	104.0	112.7	121.8		
0.56	0.75	0.99	1.28	1.63	2.05	2.55	3.13	3.80	4.58	5.47	6.49	7.64	8.94	10.39	12.02	13.83		
たわみ ≤									スパン 500	スパン 400			スパン 300			スパン 200		

## ●床板用ベアリングバーの種類

■部材の形状・寸法

呼称記号	ベアリングバー				クロスバー		エンドバー
	型式	断面係数 Z	断面二次 モーメント	ピッチ	寸法	ピッチ	型式
		(mm <sup>3</sup> )	(mm <sup>4</sup> )				
SF 319	FB 3×19	180	1710	30	□5	100	FB 3×19
SF 419	FB 4.5×19	270	2570	30	□6	100	FB 4.5×19
SF 325	FB 3×25	313	3910	30	□5	100	FB 3×25
SF 332	FB 3×32	512	8190	30	□5	100	FB 3×32
SF 338	FB 3×38	722	13700	30	□5	100	FB 3×38
SF 525	IB 5×3×25	496	5950	30	□6	100	FB 4.5×25
SF 532	IB 5×3×32	782	12500	30	□6	100	FB 4.5×32
SF 538	IB 5×3×38	1110	21000	30	□6	100	FB 4.5×38
SF 544	IB 5×3×44	1460	32200	30	□6	100	FB 4.5×44

呼称記号	ベアリングバー				クロスバー		エンドバー
	型式	断面係数 Z	断面二次 モーメント	ピッチ	寸法	ピッチ	型式
		(mm <sup>3</sup> )	(mm <sup>4</sup> )				
SF-V 319	FB 3×19	187	1820	30	□5	100	FB 3×19
SF-V 525	IB 5×3×25	499	6500	30	□6	100	FB 4.5×25
SF-V 532	IB 5×3×32	812	13410	30	□6	100	FB 4.5×32
SF-V 538	IB 5×3×38	1130	22110	30	□6	100	FB 4.5×38
SF-V 544	IB 5×3×44	1500	33290	30	□6	100	FB 4.5×44

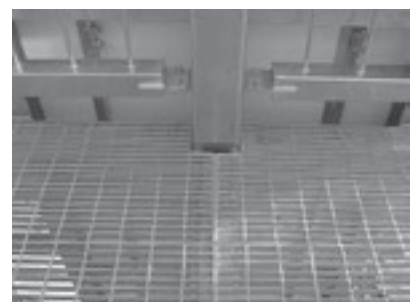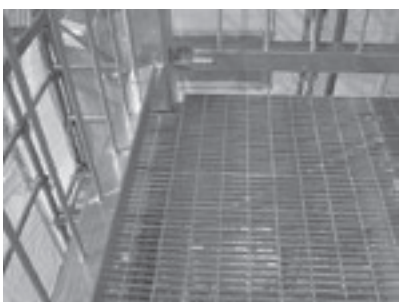

床板用

スベリ止め型